

# NOKORI 5827

58" x 27" x 23" (FREESTANDING)

Nokori's sleek and delicate lines inspire peace and calm-offering an authentic invitation to unwind.



## PRODUCT NO.

MODEL	TMU	TUB
Freestanding	BNOBRF00T-XX	BNOBRF00N-XX

THERMOMASSEUR (TMU)	
Hydro-thermo massage • Air jet system	\$
Jets	40
1 heated backrest	Included
MiaPlus® Control* (not installed)	Included
BU-Touch Control Application BUTOUCH	\$
Geysair®	Included
AromaCloud®	N/A
Illuzio Chromatherapy BCHRO6	\$

TUB Soaker	
AromaCloud®	N/A
Illuzio Chromatherapy BCHRO6	\$
WarmTouchShell® BWTS	\$
DOT control (not installed)	Included with therapy

## FEATURES

Installation type	Freestanding		
No. of bathers	2	Imp. gallons	38
US gallons	45	Brass waste kit	Included

## INTEGRATED WASTE & OVERFLOW BOVERINI-XX

White 01, Chrome 07, Brushed Nickel 09, Polished Nickel 10, Matte White with UltraVelour finish 32	Installed & Included
--	----------------------

## STANDARD COLOR

 White 01	Included
--	----------

## OPTIONS (UPCHARGE APPLICABLE)

### FINISH

UltraVelour Matte Finish (white only) BVEL2	\$
---	----

### TILE FLANGE (specify position)

Ordered with bath (not installed) BTILEN	\$
Factory-installed. Right BTILER, Left BTILEL, Front BTILEF, Back BTILEB, Special installation BTILEO	\$

### INTEGRATED WASTE & OVERFLOW BOVERINI-XX

Matte Black 19, Satin Brass 18	\$
--------------------------------	----

### AIR INTAKE & ISLAND TUB DRAIN™\*\*

Air intake & Island Tub Drain™ BAIRISLD	\$
Island Tub Drain™ BISLDD	\$
Cast Iron Island Tub Drain™ BISLDDCI	\$
Air intake BAIRINT	\$
Air intake installation	\$ net

### IF REQUIRED BY CONSTRUCTION CODE

Brass waste & overflow kit BDRCOB	\$
-----------------------------------	----



Don't forget that this bath is available in **White only**.

\* For TMU, control must be wall-mounted. Faucets must be freestanding or wall-mounted.


\*\* An Island Tub Drain™ is required when there is no access under the bath.

TOTAL PRICE \$

## FOR THE INSTALLER


SCAN TO VIEW INSTALLATION VIDEO (3:20 MIN)



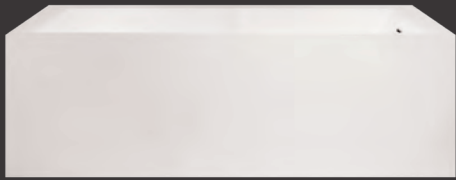

**NOKORI 5827 (FREESTANDING)**

**INSTALLATION**

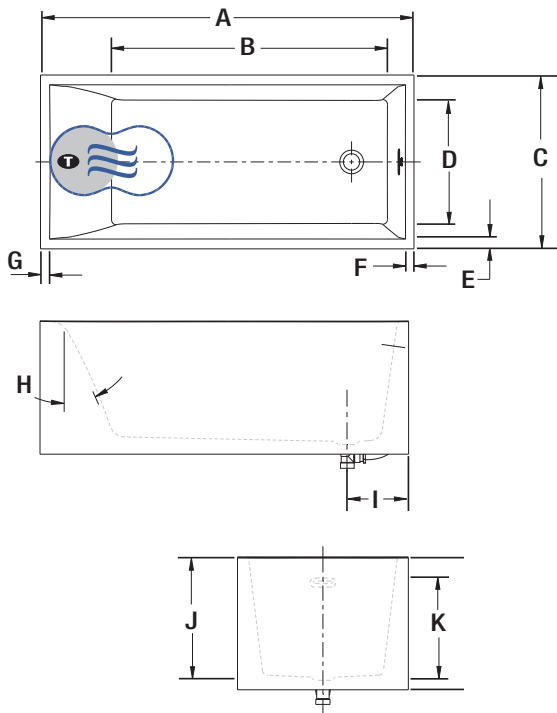

LETTER	DESCRIPTION	MEASURE
A	Total length	58"
B	Bathing well length	43 1/4"
C	Total width	27"
D	Bathing well width	19 5/8"
E	Deck width	1 3/4"
F	Deck width at drain end	1 3/4"
G	Deck width at backrest	1 1/2"
H	Slope of backrest	24°
I	Outside edge to center of drain	9 3/4"
J	Height from drain to top of deck	19"
K	Maximum water level	14 7/8"
L	Total height	23"

- Turbine position (TMU)
- Indicates heated backrest (TMU)
- Indicates WarmTouchShell® position (TUB)

**TECHNICAL SPECIFICATIONS**

<b>Hot water supply required</b>	The hot water supply should be 70% or more of the bath's total water capacity.
<b>Turbine</b>	Access to the pump must be at least 18" x 22". <b>Standard connection is 20 A, 120 V, 60 Hz</b> , dedicated line with a Ground-Fault Circuit Interrupter (GFCI). <b>For any additional option, a second line is needed 15 A, 120 V, 60 Hz</b> , dedicated line with a GFCI. Air vent necessary: 8 sq. in. minimum.
<b>Others</b>	<ul style="list-style-type: none"> <li>- The Geysair is located on the same side as the heated backrest. It must <b>NOT</b> be relocated. It must be <b>connected to the hot water supply</b> and be accessible (provide access).</li> <li>- Faucet must be freestanding or wall-mounted.</li> <li>- Controls cannot be installed on the bath.</li> <li>- The turbine should be <b>remotely installed</b>.</li> <li>- The turbine can also be installed under the bath. <b>Please refer to the Nokori Installation Instructions.</b></li> </ul>

<b>Approx. shipping weight</b>	225 lbs
<b>Turbine power</b>	550 W
<b>Air heater</b>	600 W
<b>WARRANTY</b>	
Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

\* Some restrictions apply | [www.bainultra.com/warranty](http://www.bainultra.com/warranty)

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations ([www.bainultra.com/documentation/documentation](http://www.bainultra.com/documentation/documentation)).

The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.